



N.I.S.T. H-44 REQUIRES THAT ON THE APPROACH ENDS OF THE SCALE, THE APPROACH SHALL BE AT LEAST 10 FEET OF ANY APPROACH ADJACENT TO THE PLATFORM SHALL BE LEVEL AND CONSTRUCTED OF CONCRETE FOR A MINIMUM OF 12\"/>

PLAN VIEW

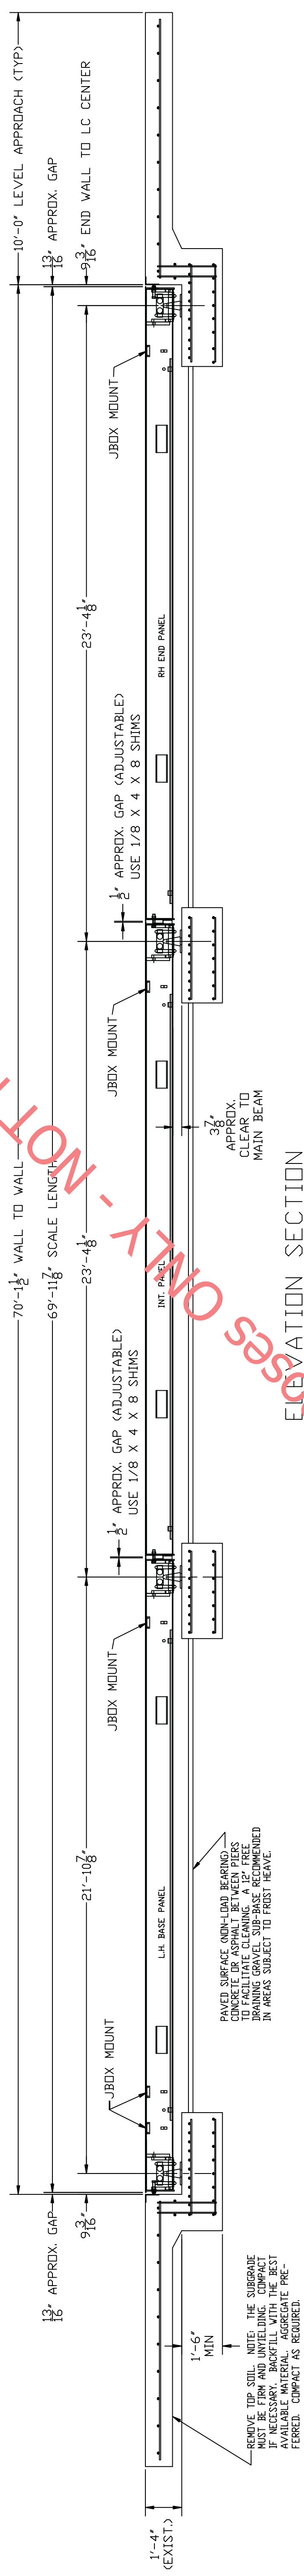

ELEVATION SECTION

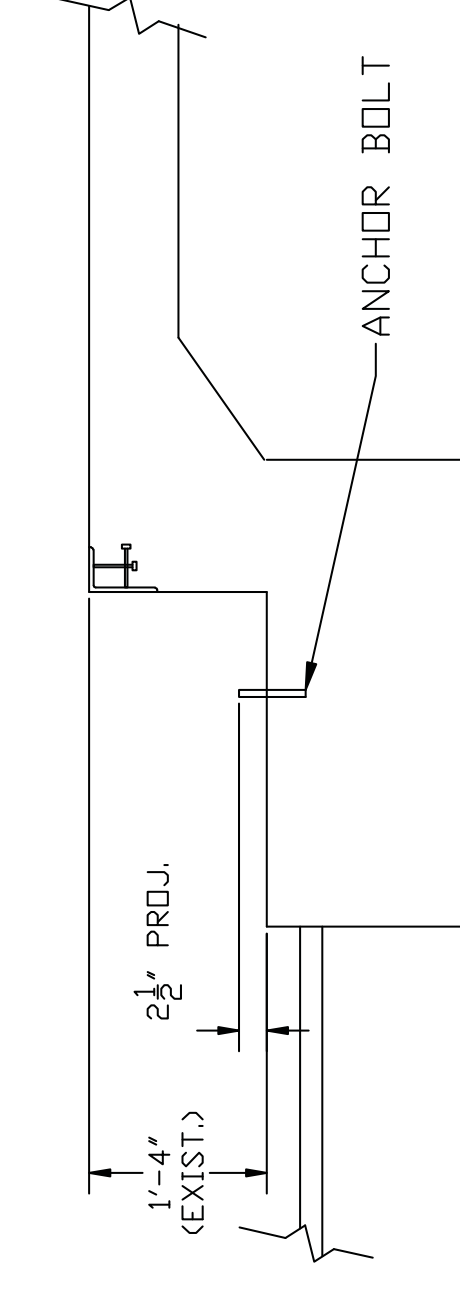

DRILL TYPE ANCHOR INFORMATION FOR THE LC STANDS (16 REQUIRED) 5/8 DIA X 6\"/>

ANCHOR DETAIL

NOTES:

- FOUNDATION IS EXISTING DESIGN. REFER TO EXISTING FOUNDATION AND ASSEMBLY DRAWINGS FOR SPECIFICATIONS OR DIMENSIONS NOT SHOWN ON THIS DRAWING. THURMAN SCALE COMPANY SHALL NOT BE RESPONSIBLE FOR THE STABILITY OF THE FOUNDATION.
- IN AREAS OF THE COUNTRY WHERE THERE IS SEVERE FREEZING, INCREASE THE DEPTH OF THE FOUNDATION SO THAT THE BOTTOM EXTENDS BELOW THE FROST LINE, OR PROVIDE A MINIMUM OF 12\"/>

THIS DRAWING IS SUPPLIED AS CHECKED BELOW:

- REFERENCE (ESTIMATES ONLY, NOT FOR CONSTRUCTION)
- CHECKED FOR CONSTRUCTION, THURMAN
- CUSTOMER APPROVAL, RETURN ONE COPY.
- ORDER ON HOLD UNTIL SIGNED COPY IS RETURNED
- APPROVED AS DRAWN, APPROVED BY: _____ DATE: _____
- APPROVED AS NOTED, APPROVED BY: _____ DATE: _____

TOLERANCES (UNLESS OTHERWISE SPECIFIED) ± 1/8\"/>

THURMAN
S C A J E
285 E. LIVINGSTON AVE.
DUNELAND, NJ 08028
PH: (614) 281-9075
FAX: (614) 281-8879